


Industrial liquid-in-glass adjustable angle thermometer

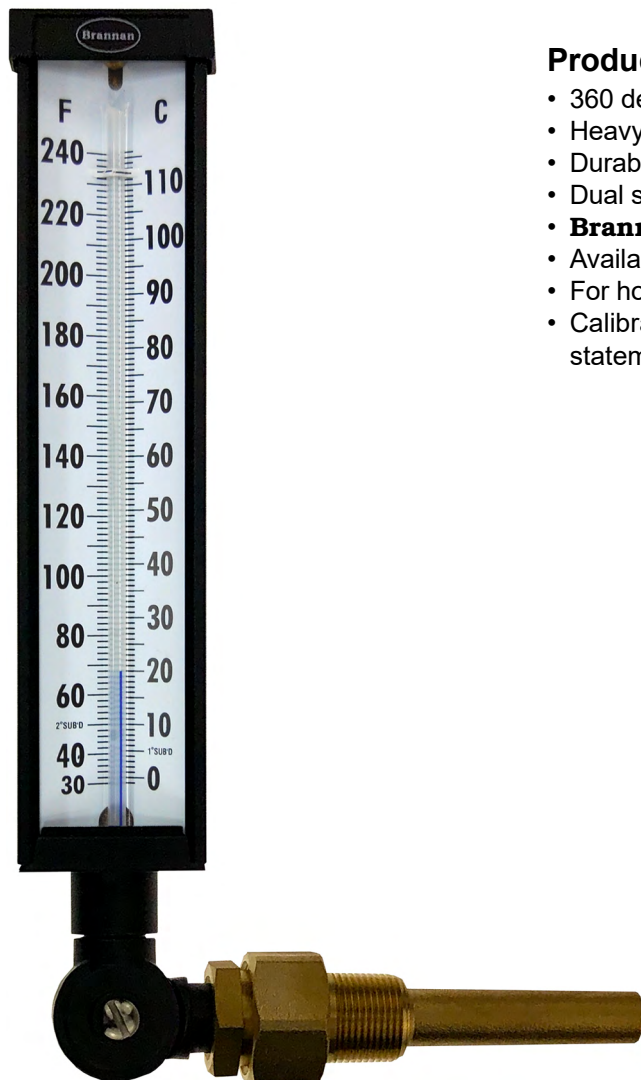

Product features:


- 360 degree rotation case for easy installation and reading
- Heavy duty protective case with glass tube thermometer
- Durable and reliable – no moving parts
- Dual scale
- **Brannan** quality and accuracy
- Available with 90mm (3.5") or 150mm (6") stem length
- For hot water and chilled water systems
- Calibration traceable to national standards or statement of conformity available, if required

Standard product specifications:

Scale	9" (230mm)
Case	Aluminium
Design	ASME B40.200
Tube	Triangle tube with blue liquid filling
Window	Glass
Form	Variable angle
Connection	3/4" NPT
Stem	90mm (3.5") or 150mm (6")
Pocket	Brass
Ranges	-40 to +110°F&C through to +50 to +400°F&C
Accuracy	+/- 1%
Protection	IP54

Industrial liquid-in-glass adjustable angle thermometer

Dimensions:

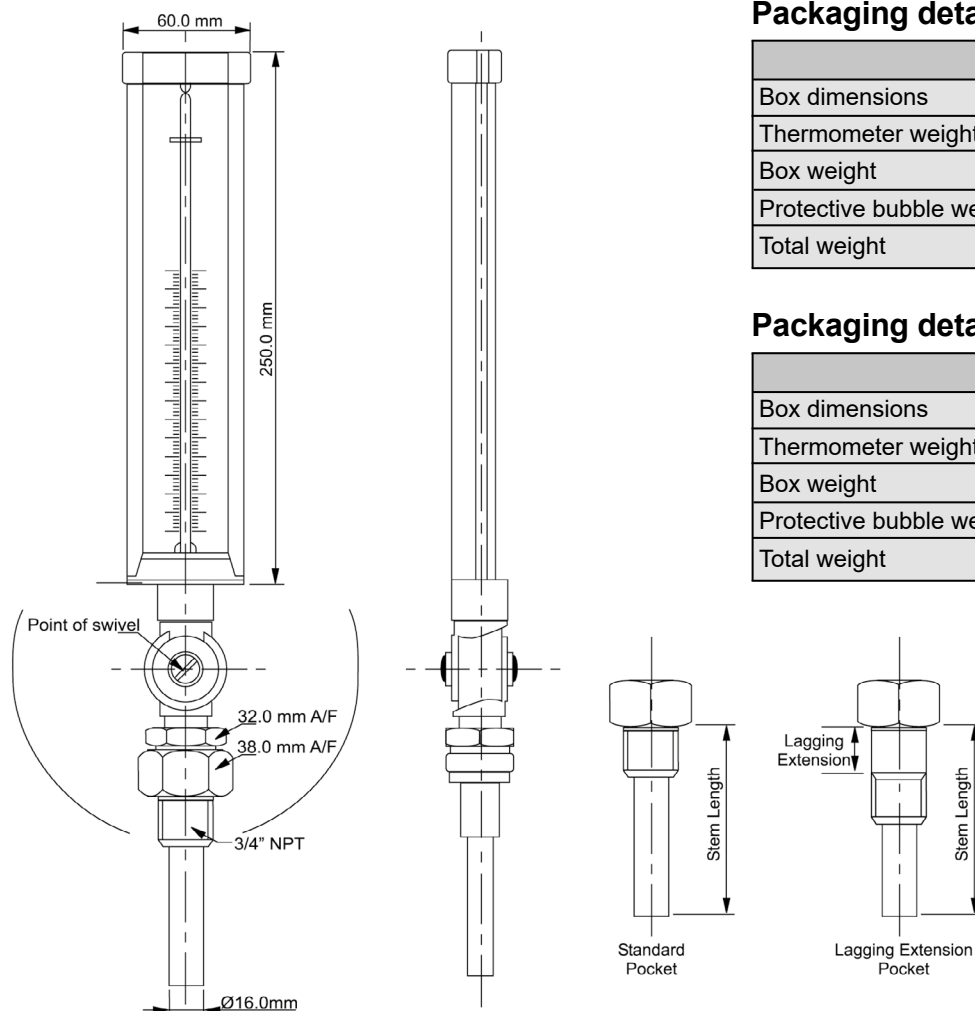

Standard product numbers:

90mm (3.5") stem:

Range	Standard pocket Product no	25mm (1") Lagging ext. Product no
-40 to 110°F&C	200/501/0	200/501/1
0 to 160°F&C	200/506/0	200/506/1
30 to 180°F&C	200/502/0	200/502/1
30 to 240°F&C	200/503/0	200/503/1
30 to 300°F&C	200/504/0	200/504/1
50 to 400°F&C	200/505/0	200/505/1

Packaging details - 90mm (3.5") stem:

	90mm (3.5") stem
Box dimensions	475 x 78 x 46mm
Thermometer weight	737.5g
Box weight	70g
Protective bubble weight	7.5g
Total weight	814g

Packaging details - 150mm (6") stem:

	150mm (6") stem
Box dimensions	545 x 78 x 46mm
Thermometer weight	859.5
Box weight	75g
Protective bubble weight	78g
Total weight	942.5g

150mm (6")stem:

Range	Standard pocket Product no	63mm (2.5") Lagging ext. Product no
-40 to 110°F&C	200/601/0	200/601/1
0 to 160°F&C	200/606/0	200/606/1
30 to 180°F&C	200/602/0	200/602/1
30 to 240°F&C	200/603/0	200/603/1
30 to 300°F&C	200/604/0	200/604/1
50 to 400°F&C	200/605/0	200/605/1

View me on
the website →

