

# Product data sheet

✉ [sales@brannan.co.uk](mailto:sales@brannan.co.uk)

☎ +44 (0)1946 816600

🌐 [brannan.co.uk](http://brannan.co.uk)

## PG050 - PHENOLIC PRESSURE GAUGE




### Features:

- High level of operator safety
- Durable and corrosion resistant case
- Glycerine can be filled in the field
- Micro adjustable pointer
- **Brannan** quality and accuracy
- Stainless steel or brass internals available
- Vibration and shock resistant mechanism
- For harsh and corrosive environments

### Standard product specifications:


<b>Dial diameters</b>	115mm
<b>Pressure range</b>	30" Hg VAC through 15000 psi
<b>Accuracy</b>	+/- 1% full scale
<b>Case &amp; ring</b>	Phenolic case and ring, bayonet type, 304mm stainless steel dull or polished ring
<b>Connection</b>	304 stainless steel or brass, 1/4" or 1/2" BSP bottom entry (NPT available on request)
<b>Window</b>	Tempered glass with O ring seal
<b>Pointer</b>	Aluminium
<b>Dial</b>	Aluminium
<b>Filling</b>	Dry
<b>Bourdon tube</b>	316 stainless steel or phosphor bronze
<b>Bourdon movement</b>	304 stainless steel or brass
<b>Calibration</b>	UKAS certification, certificate traceable to Recognised National Standard or Statement of Conformity, if required
<b>MOQ</b>	Minimum order quantities apply. Please contact our Sales Team for further information

### Dimensions:

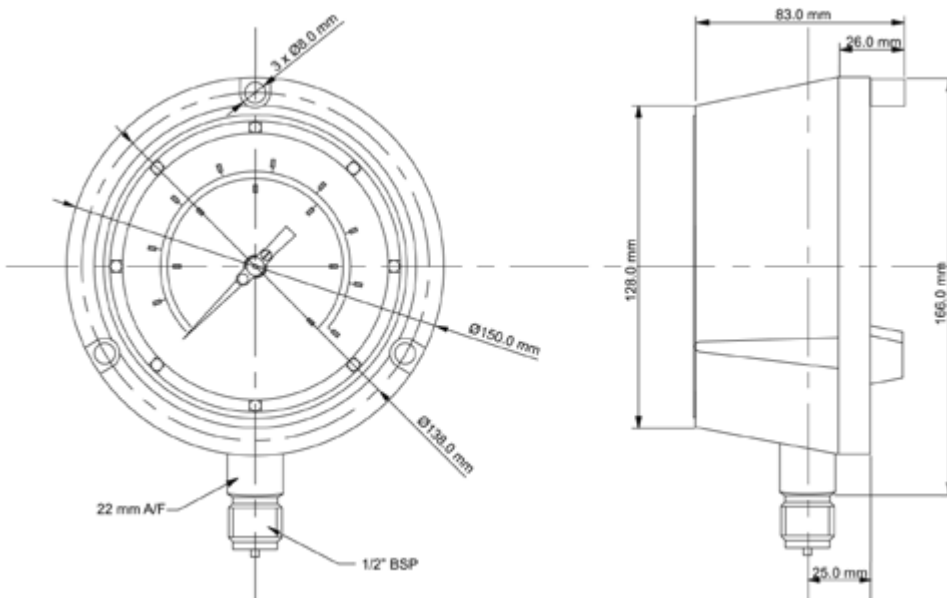

# Product data sheet

 [sales@brannan.co.uk](mailto:sales@brannan.co.uk)

 [+44 \(0\)1946 816600](tel:+44(0)1946816600)

 [brannan.co.uk](http://brannan.co.uk)

## Standard product numbers:

Please contact our Sales Team for further information regarding ranges, connections, etc.

Range bar & PSI	Brass connection		S/Steel connection	
	1/4" BSP	1/2" BSP	1/4" BSP	1/2" BSP
0 to 10 bar & PSI	36/100/1	36/100/2	36/120/1	36/120/2
0 to 16 bar & PSI	36/101/1	36/101/2	36/121/1	36/121/2
0 to 25 bar & PSI	36/102/1	36/102/2	36/122/1	36/122/2
0 to 40 bar & PSI	36/103/1	36/103/2	36/123/1	36/123/2
0 to 60 bar & PSI	36/104/1	36/104/2	36/124/1	36/124/2

## Calibration product numbers:

Calibration	No of points	Product number
UKAS	5pt	49/075/0
Traceable to National Standards	5pt	49/060/0

Other calibration types available on request

Supplied in protective bubble bag and individual box with instruction sheet.

Box dimensions: 160 x 178 x 11mm

Dial net weight	Protective bubble bag	Box & instructions	Gross weight
872g	1g	72g	945g

View me on  
the website

