

Product data sheet

✉ sales@brannan.co.uk

☎ +44 (0)1946 816600

🌐 brannan.co.uk

XT045 - STAINLESS STEEL CASED LIQUID EXPANSION THERMOMETER WITH CAPILLARY



Features:

- Weatherproof capillary thermometer with stainless steel case
- Back flange for surface mounting
- High quality liquid expansion measuring system
- Choice of dial diameters
- Supplied complete with stainless steel pocket or sliding union
- Wide choice of temperature ranges and capillary lengths
- **Brannan** quality and accuracy
- For outdoor and high humidity installations
- Wide range of associated accessories available (see Accessories section of this catalogue)

Standard product specifications:

Dial diameters	100mm & 150mm
Design	BS EN 13190
Accuracy class	2
Ranges	-40 to +40°C&F through to 0 to +250°C&F
Case	304 Stainless steel case, bezel and back flange
Seal	74 shore D polyurethane
Connection	1/2" BSP bottom connection
Stem lengths	140mm, 200mm & 250mm
Pocket lengths	63mm, 100mm & 150mm
Capillary	1.5m, 3m & 5m stainless interlocking (plastic coated bronze also available for temperature ranges up to 120°C)
Sensor mechanism	Liquid expansion (Kerosene filling)
Window	Glass
Pointer	Black plastic
Filling	Dry
Operating temperature	0 to +40°C (higher or lower temperatures can cause indication errors)
Storage temperature	-40 to +60°C
Protection	IP 67
Calibration	Certificate traceable to recognised national standard or statement of conformity, if required

Weights and packaging dimensions on request


Product data sheet

✉ sales@brannan.co.uk


☎ +44 (0)1946 816600

🌐 brannan.co.uk

Dimensions: 100mm Dial thermometer - bottom entry

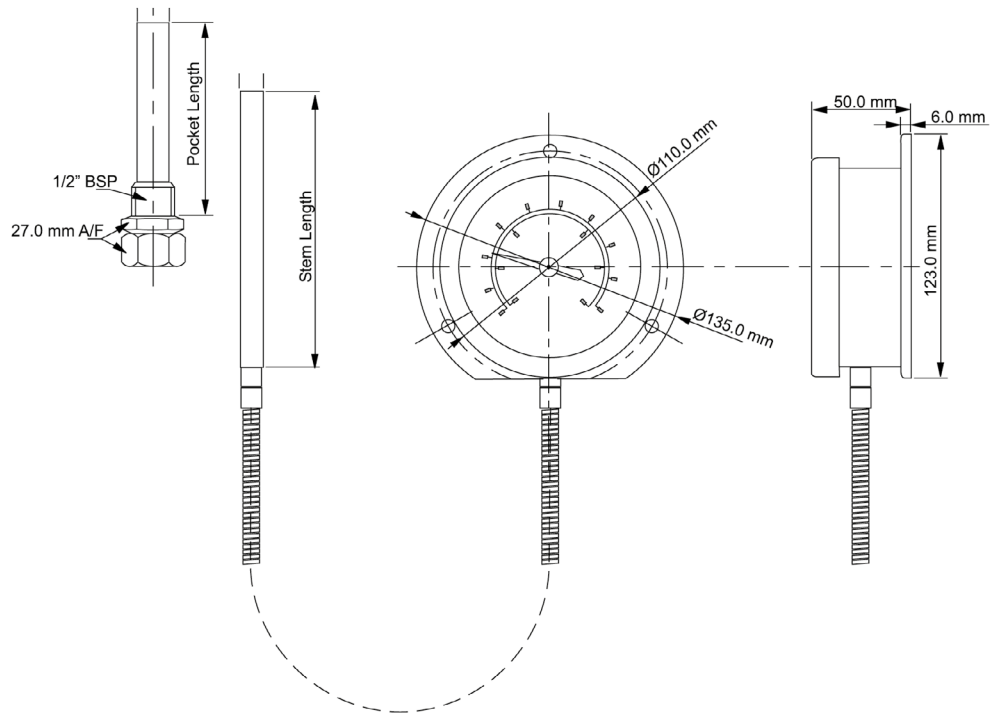

150mm Dial thermometer - bottom entry

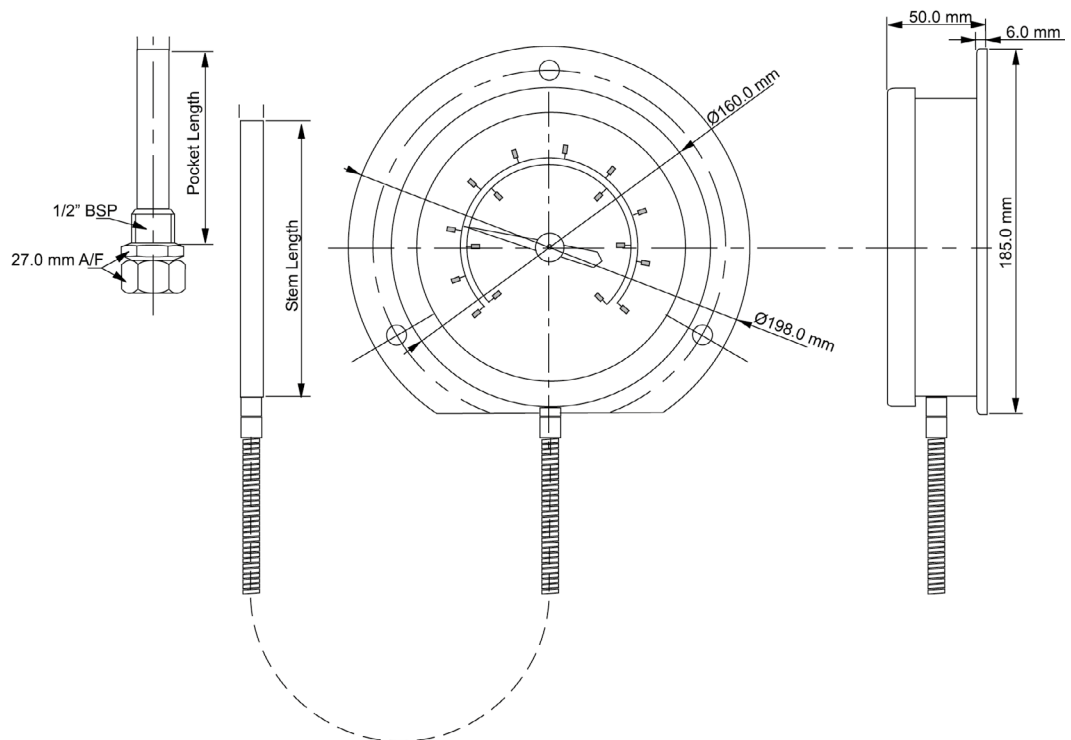

Product data sheet

 sales@brannan.co.uk

 +44 (0)1946 816600

 brannan.co.uk

Standard Product numbers:

The following are our standard product numbers for dial thermometers supplied complete with pocket or sliding union (no pocket). Special products can be supplied on request, for example, customer own branding, alternative pocket length, range, etc. Minimum order quantities apply. Please contact our Sales Team for further information.

100mm Diameter Dial with 1.5m Capillary - Stem(S) Length / Pocket(P) Length							
Range	With Pocket				With Sliding Union		
	S=140mm P=63mm	S=140mm P=100mm	S=200mm P=150mm	S=250mm P=150mm	S=140mm	S=200mm	S=250mm
-40 to +40°C only	302/621/0	302/621/1	302/621/2	302/621/3	312/621/1	312/621/2	312/621/3
-40 to +40°C&F	302/622/0	302/622/1	302/622/2	302/622/3	312/622/1	312/622/2	312/622/3
-20 to +60°C only	302/623/0	302/623/1	302/623/2	302/623/3	312/623/1	312/623/2	312/623/3
-20 to +60°C&F	302/624/0	302/624/1	302/624/2	302/624/3	312/624/1	312/624/2	312/624/3
0 to +120°C only	302/625/0	302/625/1	302/625/2	302/625/3	312/625/1	312/625/2	312/625/3
0 to +120°C&F	302/626/0	302/626/1	302/626/2	302/626/3	312/626/1	312/626/2	312/626/3
0 to +160°C only	302/627/0	302/627/1	302/627/2	302/627/3	312/627/1	312/627/2	312/627/3
0 to +160°C&F	302/628/0	302/628/1	302/628/2	302/628/3	312/628/1	312/628/2	312/628/3
0 to +200°C only	302/629/0	302/629/1	302/629/2	302/629/3	312/629/1	312/629/2	312/629/3
0 to +200°C&F	302/630/0	302/630/1	302/630/2	302/630/3	312/630/1	312/630/2	312/630/3
0 to +250°C only	302/631/0	302/631/1	302/631/2	302/631/3	312/631/1	312/631/2	312/631/3
0 to +250°C&F	302/632/0	302/632/1	302/632/2	302/632/3	312/632/1	312/632/2	312/632/3

100mm Diameter Dial with 3m Capillary - Stem(S) Length / Pocket(P) Length							
Range	With Pocket				With Sliding Union		
	S=140mm P=63mm	S=140mm P=100mm	S=200mm P=150mm	S=250mm P=150mm	S=140mm	S=200mm	S=250mm
-40 to +40°C only	303/621/0	303/621/1	303/621/2	303/621/3	313/621/1	313/621/2	313/621/3
-40 to +40°C&F	303/622/0	303/622/1	303/622/2	303/622/3	313/622/1	313/622/2	313/622/3
-20 to +60°C only	303/623/0	303/623/1	303/623/2	303/623/3	313/623/1	313/623/2	313/623/3
-20 to +60°C&F	303/624/0	303/624/1	303/624/2	303/624/3	313/624/1	313/624/2	313/624/3
0 to +120°C only	303/625/0	303/625/1	303/625/2	303/625/3	313/625/1	313/625/2	313/625/3
0 to +120°C&F	303/626/0	303/626/1	303/626/2	303/626/3	313/626/1	313/626/2	313/626/3
0 to +160°C only	303/627/0	303/627/1	303/627/2	303/627/3	313/627/1	313/627/2	313/627/3
0 to +160°C&F	303/628/0	303/628/1	303/628/2	303/628/3	313/628/1	313/628/2	313/628/3
0 to +200°C only	303/629/0	303/629/1	303/629/2	303/629/3	313/629/1	313/629/2	313/629/3
0 to +200°C&F	303/630/0	303/630/1	303/630/2	303/630/3	313/630/1	313/630/2	313/630/3
0 to +250°C only	303/631/0	303/631/1	303/631/2	303/631/3	313/631/1	313/631/2	313/631/3
0 to +250°C&F	303/632/0	303/632/1	303/632/2	303/632/3	313/632/1	313/632/2	313/632/3

Product data sheet

 sales@brannan.co.uk

 +44 (0)1946 816600

 brannan.co.uk

100mm Diameter Dial with 5m Capillary - Stem(S) Length / Pocket(P) Length							
Range	With Pocket				With Sliding Union		
	S=140mm P=63mm	S=140mm P=100mm	S=200mm P=150mm	S=250mm P=150mm	S=140mm	S=200mm	S=250mm
-40 to +40°C only	304/621/0	304/621/1	304/621/2	304/621/3	314/621/1	314/621/2	314/621/3
-40 to +40°C&F	304/622/0	304/622/1	304/622/2	304/622/3	314/622/1	314/622/2	314/622/3
-20 to +60°C only	304/623/0	304/623/1	304/623/2	304/623/3	314/623/1	314/623/2	314/623/3
-20 to +60°C&F	304/624/0	304/624/1	304/624/2	304/624/3	314/624/1	314/624/2	314/624/3
0 to +120°C only	304/625/0	304/625/1	304/625/2	304/625/3	314/625/1	314/625/2	314/625/3
0 to +120°C&F	304/626/0	304/626/1	304/626/2	304/626/3	314/626/1	314/626/2	314/626/3
0 to +160°C only	304/627/0	304/627/1	304/627/2	304/627/3	314/627/1	314/627/2	314/627/3
0 to +160°C&F	304/628/0	304/628/1	304/628/2	304/628/3	314/628/1	314/628/2	314/628/3
0 to +200°C only	304/629/0	304/629/1	304/629/2	304/629/3	314/629/1	314/629/2	314/629/3
0 to +200°C&F	304/630/0	304/630/1	304/630/2	304/630/3	314/630/1	314/630/2	314/630/3
0 to +250°C only	304/631/0	304/631/1	304/631/2	304/631/3	314/631/1	314/631/2	314/631/3
0 to +250°C&F	304/632/0	304/632/1	304/632/2	304/632/3	314/632/1	314/632/2	314/632/3

Standard product numbers:

The following are our standard product numbers for dial thermometers supplied complete with pocket or sliding union (no pocket). Special products can be supplied on request, for example, customer own branding, alternative pocket length, range, etc. Minimum order quantities apply. Please contact our Sales Team for further information.

150mm Diameter Dial with 1.5m Capillary - Stem(S) Length / Pocket(P) Length							
Range	With Pocket				With Sliding Union		
	S=140mm P=63mm	S=140mm P=100mm	S=200mm P=150mm	S=250mm P=150mm	S=140mm	S=200mm	S=250mm
-40 to +40°C only	305/621/0	305/621/1	305/621/2	305/621/3	315/621/1	315/621/2	315/621/3
-40 to +40°C&F	305/622/0	305/622/1	305/622/2	305/622/3	315/622/1	315/622/2	315/622/3
-20 to +60°C only	305/623/0	305/623/1	305/623/2	305/623/3	315/623/1	315/623/2	315/623/3
-20 to +60°C&F	305/624/0	305/624/1	305/624/2	305/624/3	315/624/1	315/624/2	315/624/3
0 to +120°C only	305/625/0	305/625/1	305/625/2	305/625/3	315/625/1	315/625/2	315/625/3
0 to +120°C&F	305/626/0	305/626/1	305/626/2	305/626/3	315/626/1	315/626/2	315/626/3
0 to +160°C only	305/627/0	305/627/1	305/627/2	305/627/3	315/627/1	315/627/2	315/627/3
0 to +160°C&F	305/628/0	305/628/1	305/628/2	305/628/3	315/628/1	315/628/2	315/628/3
0 to +200°C only	305/629/0	305/629/1	305/629/2	305/629/3	315/629/1	315/629/2	315/629/3
0 to +200°C&F	305/630/0	305/630/1	305/630/2	305/630/3	315/630/1	315/630/2	315/630/3
0 to +250°C only	305/631/0	305/631/1	305/631/2	305/631/3	315/631/1	315/631/2	315/631/3
0 to +250°C&F	305/632/0	305/632/1	305/632/2	305/632/3	315/632/1	315/632/2	315/632/3

Product data sheet

150mm Diameter Dial with 3m Capillary - Stem(S) Length / Pocket(P) Length							
Range	With Pocket				With Sliding Union		
	S=140mm P=63mm	S=140mm P=100mm	S=200mm P=150mm	S=250mm P=150mm	S=140mm	S=200mm	S=250mm
-40 to +40°C only	306/621/0	306/621/1	306/621/2	306/621/3	316/621/1	316/621/2	316/621/3
-40 to +40°C&F	306/622/0	306/622/1	306/622/2	306/622/3	316/622/1	316/622/2	316/622/3
-20 to +60°C only	306/623/0	306/623/1	306/623/2	306/623/3	316/623/1	316/623/2	316/623/3
-20 to +60°C&F	306/624/0	306/624/1	306/624/2	306/624/3	316/624/1	316/624/2	316/624/3
0 to +120°C only	306/625/0	306/625/1	306/625/2	306/625/3	316/625/1	316/625/2	316/625/3
0 to +120°C&F	306/626/0	306/626/1	306/626/2	306/626/3	316/626/1	316/626/2	316/626/3
0 to +160°C only	306/627/0	306/627/1	306/627/2	306/627/3	316/627/1	316/627/2	316/627/3
0 to +160°C&F	306/628/0	306/628/1	306/628/2	306/628/3	316/628/1	316/628/2	316/628/3
0 to +200°C only	306/629/0	306/629/1	306/629/2	306/629/3	316/629/1	316/629/2	316/629/3
0 to +200°C&F	306/630/0	306/630/1	306/630/2	306/630/3	316/630/1	316/630/2	316/630/3
0 to +250°C only	306/631/0	306/631/1	306/631/2	306/631/3	316/631/1	316/631/2	316/631/3
0 to +250°C&F	306/632/0	306/632/1	306/632/2	306/632/3	316/632/1	316/632/2	316/632/3

150mm Diameter Dial with 5m Capillary - Stem(S) Length / Pocket(P) Length							
Range	With Pocket				With Sliding Union		
	S=140mm P=63mm	S=140mm P=100mm	S=200mm P=150mm	S=250mm P=150mm	S=140mm	S=200mm	S=250mm
-40 to +40°C only	307/621/0	307/621/1	307/621/2	307/621/3	317/621/1	317/621/2	317/621/3
-40 to +40°C&F	307/622/0	307/622/1	307/622/2	307/622/3	317/622/1	317/622/2	317/622/3
-20 to +60°C only	307/623/0	307/623/1	307/623/2	307/623/3	317/623/1	317/623/2	317/623/3
-20 to +60°C&F	307/624/0	307/624/1	307/624/2	307/624/3	317/624/1	317/624/2	317/624/3
0 to +120°C only	307/625/0	307/625/1	307/625/2	307/625/3	317/625/1	317/625/2	317/625/3
0 to +120°C&F	307/626/0	307/626/1	307/626/2	307/626/3	317/626/1	317/626/2	317/626/3
0 to +160°C only	307/627/0	307/627/1	307/627/2	307/627/3	317/627/1	317/627/2	317/627/3
0 to +160°C&F	307/628/0	307/628/1	307/628/2	307/628/3	317/628/1	317/628/2	317/628/3
0 to +200°C only	307/629/0	307/629/1	307/629/2	307/629/3	317/629/1	317/629/2	317/629/3
0 to +200°C&F	307/630/0	307/630/1	307/630/2	307/630/3	317/630/1	317/630/2	317/630/3
0 to +250°C only	307/631/0	307/631/1	307/631/2	307/631/3	317/631/1	317/631/2	317/631/3
0 to +250°C&F	307/632/0	307/632/1	307/632/2	307/632/3	317/632/1	317/632/2	317/632/3

Product data sheet

✉ sales@brannan.co.uk

☎ +44 (0)1946 816600

🌐 brannan.co.uk

APK010 - REPLACEMENT POCKETS FOR THERMOMETERS

Use of Thermometer Pockets

Standard pockets, nominal length up to and including 100mm, are suitable for working pressure up to 40 bar. Pockets exceeding 100mm nominal length will normally be fabricated and are only suitable for working pressure of up to 25 bar. Thermometers are normally supplied complete with pockets and should not be installed on a pressurised system without suitable pocket.

Product features

- Available in brass or stainless steel
- To suit stem lengths 50mm, 100mm or 150mm

Applications

- Heating, ventilation, air-conditioning
- Hot water
- Industrial



Connection	Supplied as standard / on special request	Material	Product numbers			
			L=63mm	L=100mm	L=130mm	L=150mm
1/2" BSP M with nut & O'ring	Standard	Stainless Steel	39/639/0	39/617/0	-	39/641/0
1/2" NPT M	Special request	Stainless steel	-	39/117/1	-	-
1/2" BSP M	Special request	Stainless steel	-	-	39/140/0	-
1/2" BSP M	Special request	Brass	39/136/0	39/127/0	39/150/0	39/151/0

Personalised instrumentation

As an additional service, we are able to offer full, four colour, logo print on Brannan gauges to personalise your products. Our state of the art printing process enables us to work with you to provide a branded product to enhance your instruments. This service is provided at our UK manufacturing facility and so enables a rapid turnaround (ex-stock gauges). Please contact our sales team for details.



View me on
the website

