## **DS002**



### Diaphragm seal - Flanged flush type



#### **Product features:**

- · Flush diaphragm
- Welded diaphragm seal
- Flange designed as per ANSI B 16.5
- · Various fill fluids available
- · Wide flange sizes and pressure ratings
- A choice of diaphragm materials to allow suitability with a wide range of processes
- Brannan quality

### **Applications:**

- · Oil and gas.
- · Process industry
- Chemical and petrochemical

### Standard product specifications:

Туре	Machined flange with welded flush diaphragm			
Design	ANSI B 16.5 (contact us for DIN design)			
Flange size	1½", 2" or 3"			
Pressure rating	150 lbs to 2500 lbs			
Mounting	Direct mounting (please contact us for remote mounting options)			
Flange facing	Raised face			
Diaphragm material	Stainless steel 316L, Hastelloy C, Inconel, Monel, Tanatlum.			
Flange material	Stainless steel 316, Stainless steel 316L, Hastelloy C			
Instrument connection material	Stainless steel 304			
Instrument connection	1/4", 3/8" or 1/2" BSP/NPT Female			
Max pressure	Dependent on flange rating			
Process temperature	Dependent on fill fluid, see below for details			
Filling fluid	Glycerine (-18 to 204°C)			
	Silicone (-40 to +305°C)			
	Halocarbon (-56 to 149°C)			
	Syltherm 800 (-40 to +400°C)			
Fill port	Upper housing - set screw			




# **DS002**



### Diaphragm seal - Flanged flush type

### **Product dimensions:**

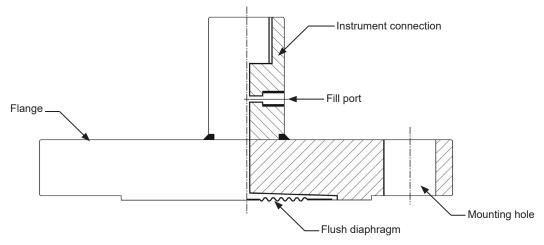

#### **Product numbers:**

All DS002 diaphragm seals are ordered to specific customer specifications. Please use below matrix to create your unique product reference, using the values in bold.

Make	Model	Diaphragm material	Instrument connection	Flange size	Rating	Filling fluid	Extras
Brannan (BRN)	DS002 (DS02)	SS 316L (316L)	1/4" BSP (3)	1½" (1.5)	150 lbs <b>(150)</b>	Glycering (-18 to 204°C)	Materials Test Certificate
, ,		Monel	1/4" NPT <b>(4)</b>	2" <b>(2)</b>	300 lbs <b>(300)</b>	(G)	(MTC)
		(MON)	3/8" BSP <b>(5)</b>	3" <b>(3)</b>	600 lbs <b>(600)</b>	Silicone (-40 to +305°C)	
		Hastelloy C (HAS)	3/8" NPT <b>(6)</b>		900 lbs <b>(900)</b>	(S)	
		Inconel	1/2" BSP <b>(7)</b>		1500 lbs <b>(1500)</b>	Halocarbon (-56 to 149°C)	
		(INC)	1/2" NPT <b>(8)</b>		2500 lbs <b>(2500)</b>	(H)	
		Tantalum ( <b>TAN</b> )				Syltherm 800 (-40 to +400°C) (SY800)	
						NB. Other units available on request	

### Order example:

Make	Model	Diaphragm material	Instrument connection	Flange size	Rating	Filling fluid	Extras
BRN	DS02	316L	4	1.5	150	S	

Product reference: BRNDS02/316L/4/1.5/150/S

