

ANV041

Stainless steel needle valve with vent hole



Product features:

- Block and bleed valve, conical tip type.
- Provides complete shut off or adjustable throttling of the pressure media.
- M8 vent hole
- Stainless steel 316, 316L, Monel or Hastelloy C materials available
- A choice of male, female, and socket weld connections
- NACE compliant optional
- **Brannan** quality

Product applications:

- Instrument isolation and venting
- For use on gas and liquid applications
- Oil and gas
- Chemical and Petrochemical
- Power generation
- Water & wastewater
- Other process applications


Product specifications:

Valve orientation	Straight
Process/Instrument connection	Male x Female, Female x Female, Male x Male
Connection size/type	1/4", 3/8", 1/2" BSP/BSPT/NPT
Max pressure	400 bar (for max pressure up to 700 bar please contact our sales team)
Max temperature	240°C
Body material Valve material Bonnet material Stem material Tip material	Choice between: Carbon steel, SS 304, SS 316, SS 316L, Monel, Hastelloy C
Stem / gland packing	PTFE or graphite
Stem	Type CT: Conical tip press fitted hard chrome plated
Stem packing area	Burnished finish for smooth valve operation
Safety feature	Back seating to prevent stem blowout
Vent	M8


Stainless steel needle valve with vent hole

Product dimensions:


Type F x F

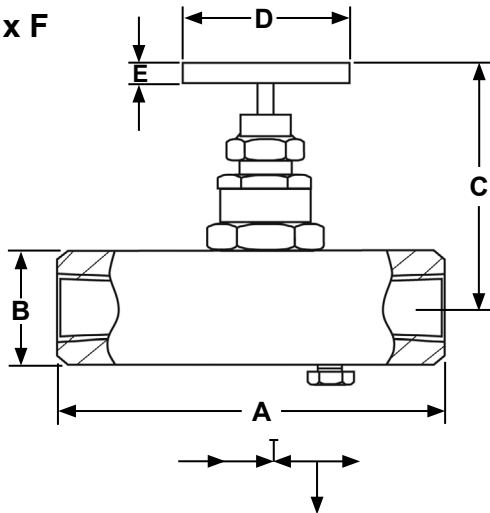

Type M x F

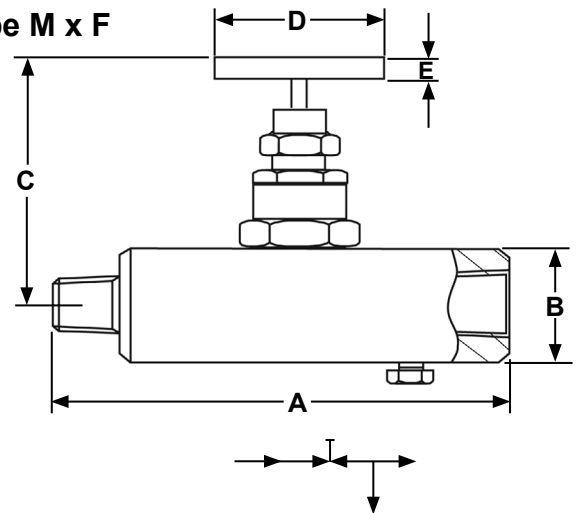

Type M x M

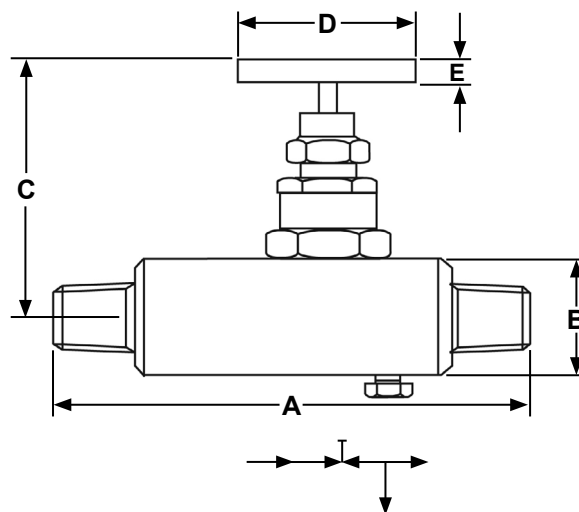

Size	Type	Length A	Width B	Height (open) Max, C	Handle D	Handle OD E
1/4"	FxF	70	25	63	40	10
	MxF	70	25	63	40	10
	MxM	75	25	63	40	10
3/8"	FxF	70	25	63	40	10
	MxF	70	25	63	40	10
	MxM	75	25	63	40	10
1/2"	FxF	75	32	83.6	50	12
	MxF	83	32	83.6	50	12
	MxM	88	32	83.6	50	12

All dimensions in mm

Stainless steel needle valve with vent hole

Product numbers:

All ANV041 needle valves are ordered to specific customer specifications. Please use below matrix to create your unique ordering product reference, using the values in bold.

Make	Model	Wetted material	Stem packing	Process/instruments connection	Connection size & type	Extras		
Brannan (BRN)	ANV041 (ANV41)	Carbon steel (CAR)	PTFE (P)	Female to Female (FF)	1/4" x 1/4" BSP (3)	Compliance to NACE MR-0175 (NACE)		
		SS304 (304)	Graphite (G)	Male to Male (MM)	1/4" x 1/4" NPT (4)	Materials test certificate (MTC)		
		SS316 (316)		Male to Female (MF)	1/4" x 1/4" BSPT (10)			
		SS316L (316L)	Socket weld available on request		3/8" x 3/8" BSP (5)	For oxygen service (O)		
		Monel (MON)			3/8" x 3/8" NPT (6)			
		Hastelloy C (HAS)			3/8" x 3/8" BSPT (11)			
					1/2" x 1/2" BSP (7)			
					1/2" x 1/2" NPT (8)			
					1/2" x 1/2" BSPT (12)		NB. When more than one extra is required, separate each code with a hyphen when building your product reference.	

NB. When more than one extra is required, separate each code with a hyphen when building your product reference.

Order example:

Make	Model	Wetted material	Stem packing	Process/instruments connection	Connection size & type	Extras
BRN	ANV41	316	P	MF	8	NACE-MTC

Product reference: BRNANV41/316/P/MF/8/NACE-MTC

Special product reference - 74/250/0 (BRNANV41/316/P/FF/7):

SS316 needle valve with vent

1/2" BSP F x 1/2" BSP F

PTFE packing